

400 Watt Electric Vehicle Charger

Description:

The EVC400 Watt is a 2 stage constant current / constant voltage charger for use in charging Lithium Ion battery systems used in Electric Vehicles

- Universal AC Input / Full Range
- 90 – 264 VAC Input
- High Reliability
- Communications via CAN bus
- Efficiency up to 92%
- Over Voltage Protection
- Short Circuit Protection
- Over Temperature Protection
- Waterproof IP64 Enclosure
- RoHS Compliant
- 2 Year Warranty



| Model Number | Output Current | Current Range | Voltage Range |
|--------------|----------------|---------------|-----------------|
| EVC-58-400 | 6.8A | 3.4 - 6.8 A | 39.2 V - 58.15V |

Specifications:

| Input Parameters | | | | |
|---|--------------|----------|------------|------------------|
| | Min | Typ | Max | Units |
| Input Voltage Range* *Designed to optimum performance at 110 and 220 nominal lines | 90 | 110 | 264 | VAC |
| Input Frequency | | 47 – 63 | | Hz |
| Power Factor 110 VAC Input, Full Load 220 VAC Input, Full Load | 0.98 0.96 | | | |
| Input Current 110 VAC, Continuous 240 VAC, Continuous | | | 4.5 2.0 | A _{RMS} |
| Efficiency 115 VAC Full Load 220 VAC Full Load | | 92 93 | | % |

| Output Parameters | | | | |
|---|-------|-------|-------|--------------------|
| | Min | Typ | Max | Units |
| Output Power | 133.3 | 380.3 | 395.4 | W |
| Noise & Ripple – I _{out} 25°C – 20MHz bandwidth | | | 20 | % I _{out} |
| Turn-on Delay Time – Full Load | | | 3 | Sec |
| Overshoot and Undershoot Response (Power On/Off) | | | 30 | % |

Specifications:



| General Specifications | | | |
|-------------------------------|---|-----|----|
| Short Circuit Protection | Hiccup Mode Self Recovery when fault is removed | | |
| Over Voltage Protection | Enters latch mode OVP when output voltage is between 65 and 75V. The unit will return to normal operation when powered back on. | | |
| Over Temperature Protection | The unit will go into thermal protection as the maximum temperature outside the case exceeds 100±5 °C. The unit will enter hiccup mode and will self-recover when the temperature becomes normal. | | |
| MTBF: (MIL-HDBK-217F 25°C) | ≥ 200,000 Hours | | |
| Temperature - Operating | MIN | -23 | °C |
| | MAX | 85 | |
| Temperature - Storage | MIN | -40 | °C |
| | MAX | +85 | |
| Relative Humidity | 10% - 100% | | |
| Weatherproof | IP64 for Enclosure IP25 for Charger Connector | | |
| Case Size | 8.27" x 6.10" x 1.65" 210mm x 155mm x 42mm | | |
| Unit Weight | TBD kg | | |
| Agency Approval | Designed to meet UL/CSA and TUV | | |

| Electromagnetic Compatibility EMI/EMC | |
|--|--|
| EMI, RFI | Comply with EN55002 Class A, shall have a minimum if 6dB margin. |
| Immunity: | |
| EN61000-3-2 | Harmonic Current Emission |
| EN61000-3-3 | Voltage Fluctuations and Flicker |
| EN61000-4-2 | ESD 8kV Air Discharge, 4kV Contact Discharge |
| EN61000-4-3 | Radio-Frequency Electromagnetic Field Susceptibility Test-Rs |
| EN61000-4-4 | Electrical Fast Transient/Burst – EFD |
| EN61000-4-5 | Surge Immunity Test, AC power line: line to line 2kV, line to each 4kV |
| EN61000-4-6 | Conducted Radio Frequency Disturbance |
| EN61000-4-8 | Power Frequency Magnetic Field Test |
| EN61000-4-11 | Voltage Dips |


Notes:

- (1) Specification is subject to change without notice.
- (2) See Green Watt Power website for RoHS statement.
www.greenwattpower.com/pdf/rohs.pdf

Derating Curves:

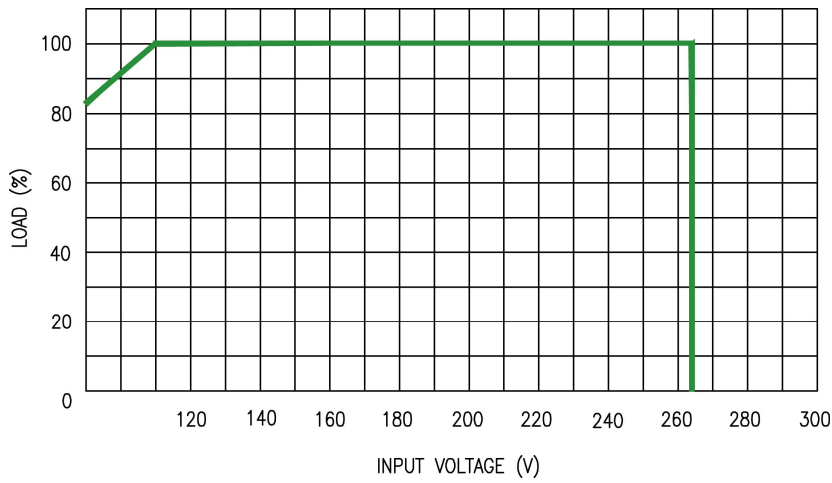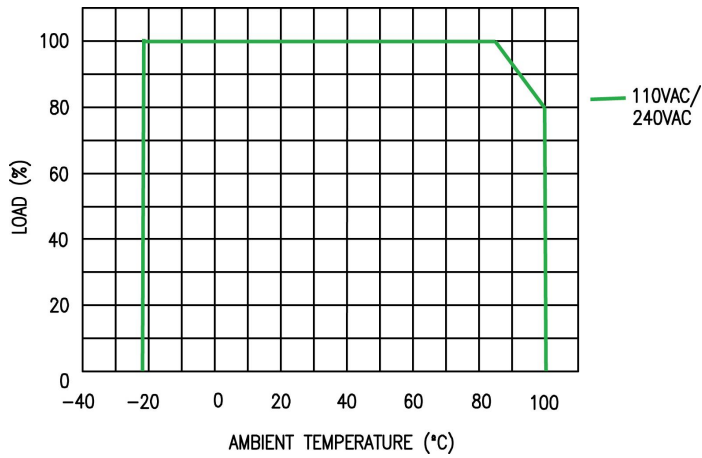


Charging Curve:

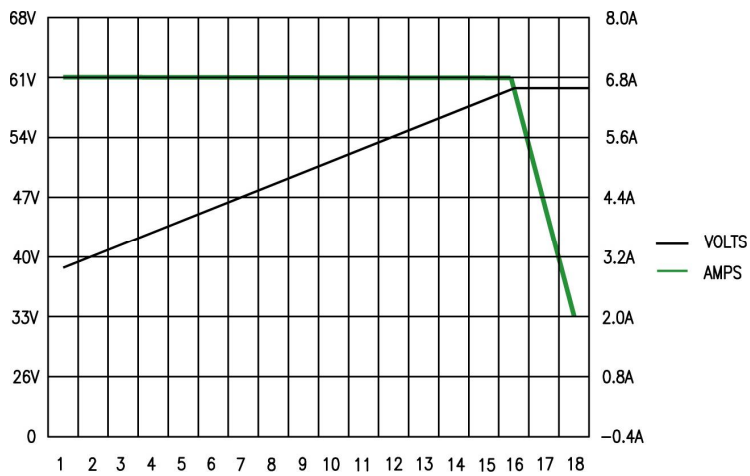

Case Specifications:

All dimensions are inches

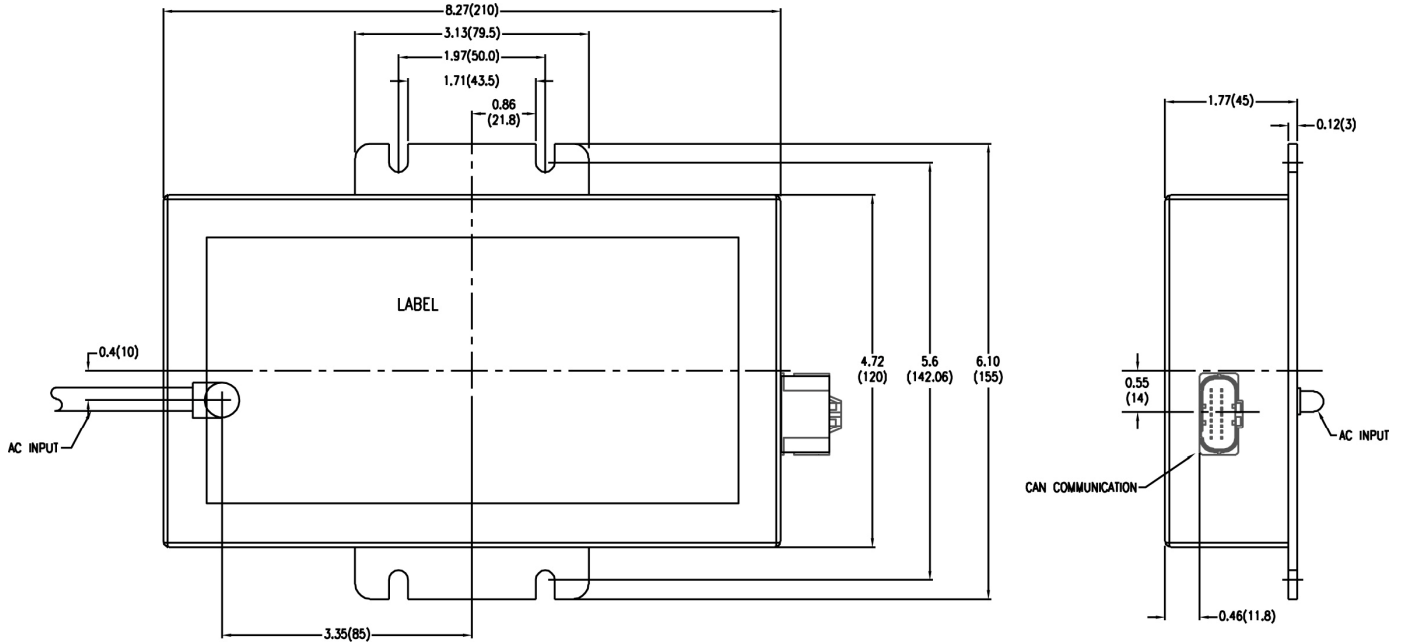

CAN Signal Connector:

Will be JAE MX23A18NF1 present on a PCB connector and shall be mounted to the charger body Pinout, by pin number. Undefined pins are no connection or factory use.

| Pin | Function |
|-----|------------------|
| 1 | LED Power |
| 2 | LED ref |
| 3 | Charger Output - |
| 4 | Not Connected |
| 5 | Not Connected |
| 6 | CANL |
| 7 | CANH |
| 8 | Not Connected |
| 9 | Charger Output + |

| Pin | Function |
|-----|--|
| 10 | Charger Output + |
| 11 | Ob_charger_attached [charger_attached] |
| 12 | Charger_en_0 [charger_en_n] |
| 13 | Ob_charger_ref_0 [charger_gnd_ref] |
| 14 | Charger Output - |
| 15 | Programming gnd |
| 16 | Programming bgnd |
| 17 | Programming reset |
| 18 | Programming vdd |